



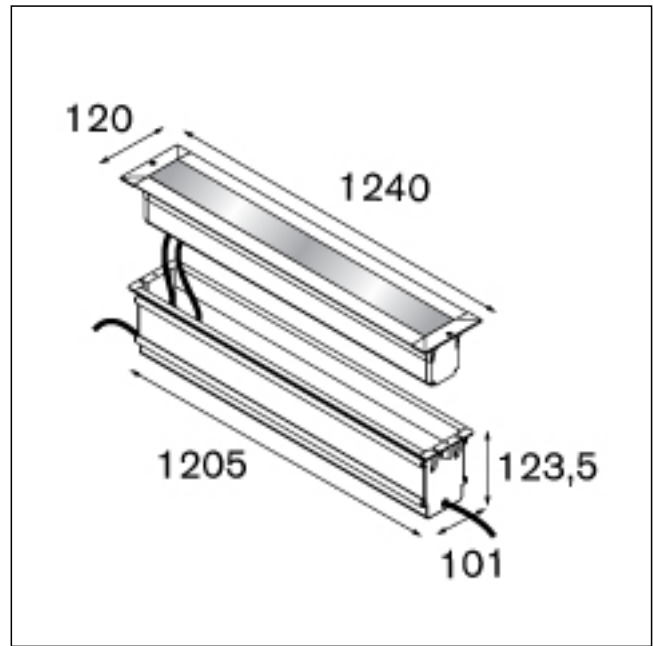

BLED < 2000lm RGB GE

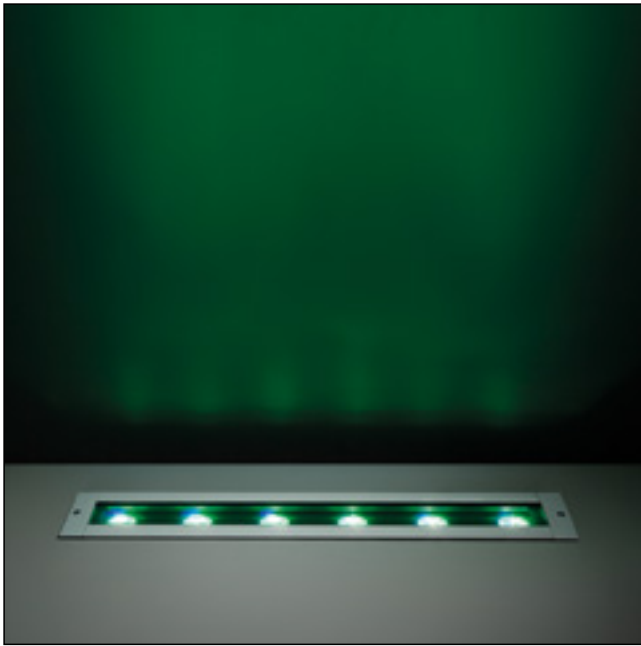

PRODUCT DATA

Ballast/transfo	
Richtbaar	-
Inbouwmaat	I 1205 w 101 h 123,5
Gewicht	5.97 kg
Voltage	350mA
Minimale afstand	0.5 m
IP	IP65
Gloeidraadtest	- °C
Opmerking	! conbox included ! 11730605 Bled bracket ! 11760530 gear LED driver 40W 24V ! 11760630 gear LED driver 60W 24V ! 11760830 gear LED driver 100W 24V ! 11760930 gear LED driver 240W 24V ! 11762230 dimmable gear LED driver 24V

shiny white (white struc interior)	11730365
shiny white (white struc interior)	11730565





BLED < 2000lm RGB GE medium shiny white (white struc interior)

LIGHTING PERFORMANCE	
Source quantity	36
Source type	high power LED
Colour temperature	-
Luminaire flux	-
Power consumption	36 W
Luminaire efficacy	-
CRI	-
Beam angle	-
Source lifetime	-
Type connection	Serial connection