




BLED < 2200lm GE

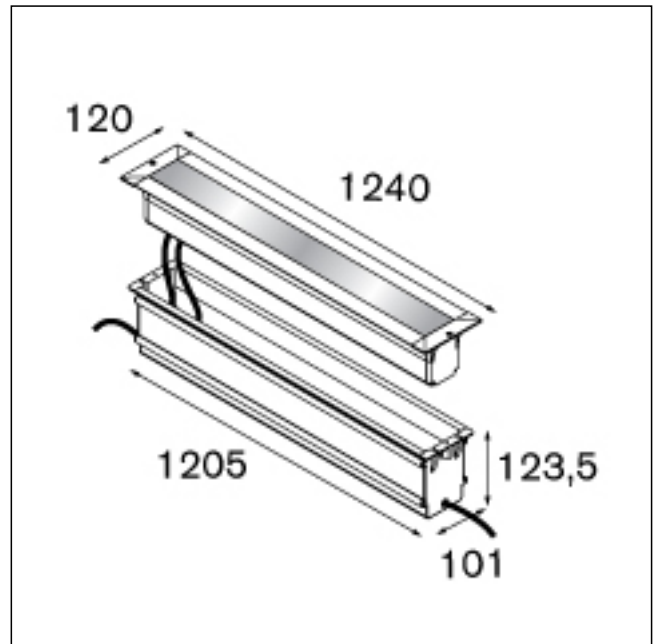

PRODUCT DATA

Ballast/transfo

Richtbaar

-

Inbouwmaat

I 1205 w 101 h 123,5

Gewicht

5.97 kg

Voltage

24V

Minimale afstand

0.5 m

IP

IP65

Gloeidraadtest

- °C

Opmerking

! conbox included ! 11730605 Bled bracket ! 11760630 gear LED driver 60W 24V ! 11760830 gear LED driver 100W 24V ! 11760930 gear LED driver 240W 24V

3150K

MEDIUM

shiny white (white struc interior)

11730165





BLED < 2200lm GE medium shiny white (white struc interior)

LIGHTING PERFORMANCE	
	WARM WHITE
Source quantity	36
Source type	high power LED
Colour temperature	3150K
Luminaire flux	846.07 Lm
Power consumption	48 W
Luminaire efficacy	17.63 Lm/W
CRI	93
Beam angle	16.0°
Source lifetime	-
Type connection	Parallel connection